

KING RUBY V07

TECHNICAL SPECIFICATIONS



Dimensions: 60 a 62 cm seat centres
84 cm depth
110 cm height

Backrest: Cold moulded polyurethane foam 'UNIBLOCK' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Different options of backrest drawing. Polyurethane density 55 Kg/m³.

Seat: Cold moulded polyurethane foam 'UNIBLOCK' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.

Side panel: Texturized injected polypropylene, 80mm. End row panels completely upholstered. Concealed floor fixation system.

Armrest: Texturized injected polypropylene, including integrated cupholder.


Volume: 0.210 m³/unit

Weight: 21.10 Kg not assembled




KING RUBY V07

DRAWING

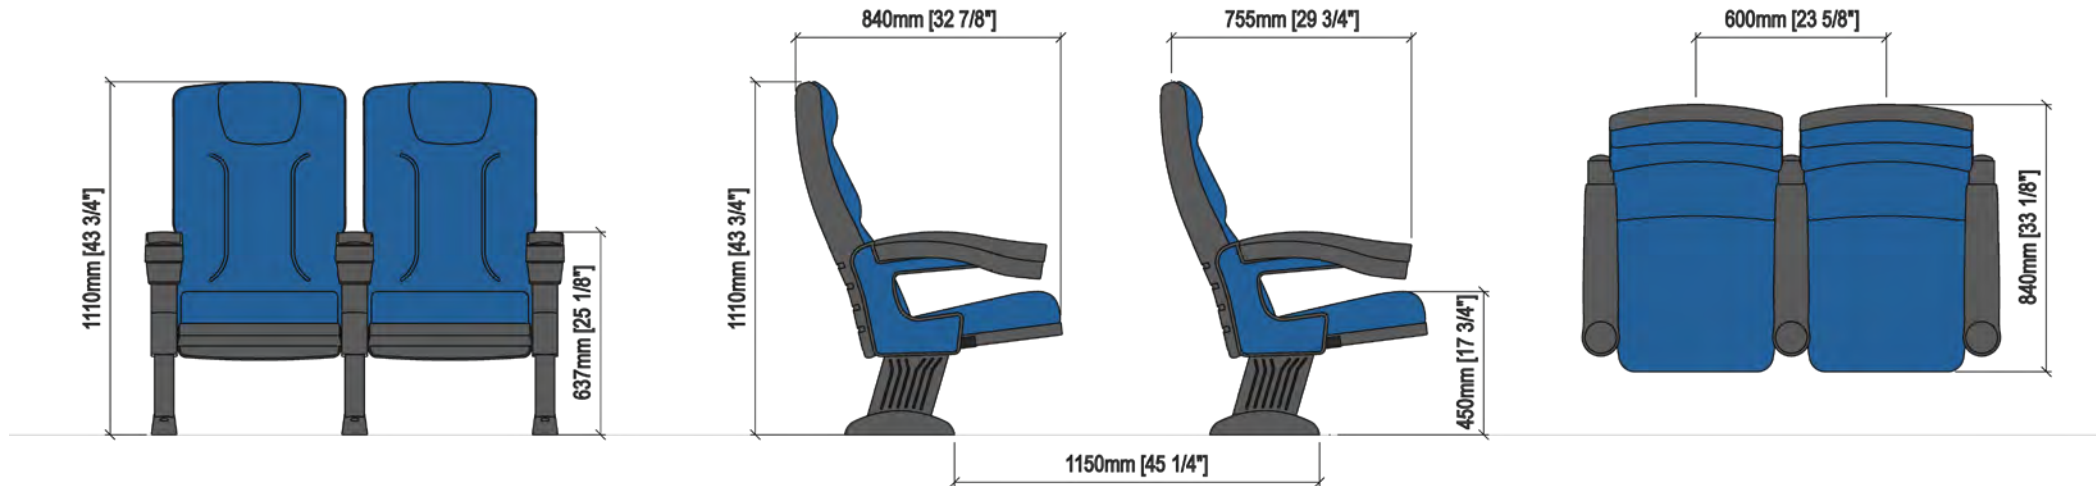

OPTIONS

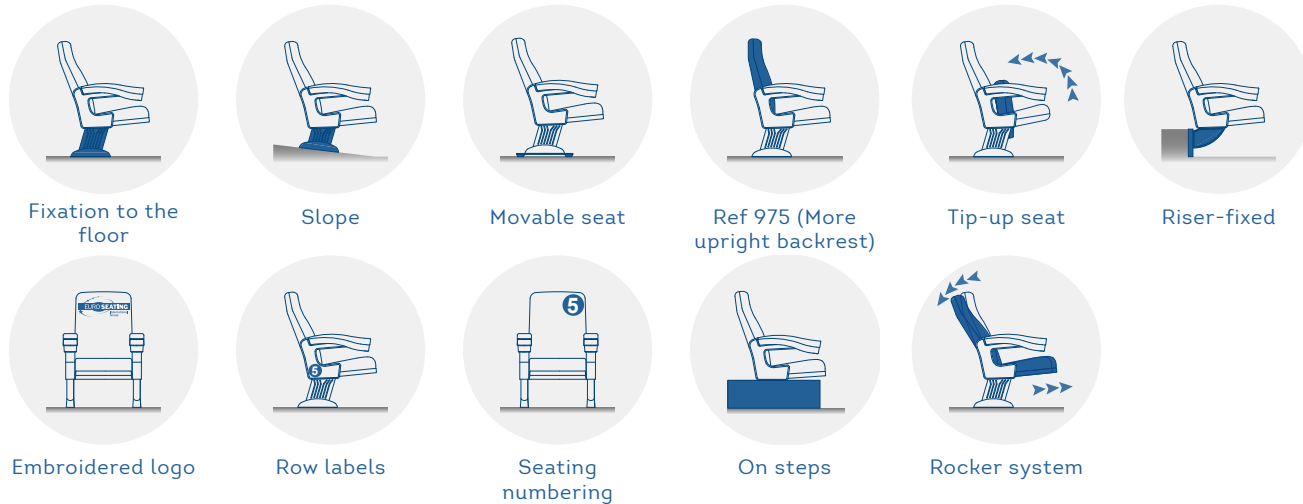

CERTIFICATES

	Fabrics	Fire barrier	Foam
BS 5852:2006	•		
BS-EN 1021-1:2006	•		
CAL TB 117-2013, SECTION 1	•		
UNE 23.727-90 1R (M1)	•	•	
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006	•	•	•
BS 5852:1979 Part 1		•	



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.